



LCD CONNECTORS


J1 FFC BOT 32/0.5 (5.6" TFT)
FFC BOT 32/0.5 COMB1

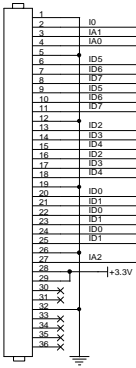


RABBIT 4000

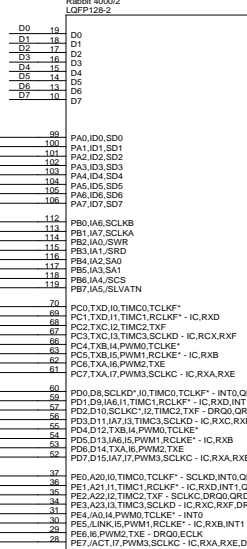


MEMORY




SERIAL FLASH




TOUCHSCREEN




SYSTEM MANAGEMENT




SDCARD




EXPANSION HEADERS




EXPANSION HEADERS

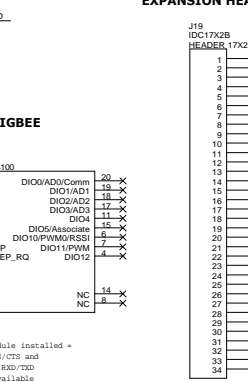


5V BACKLIGHT




OSCILLATORS




POWER SUPPLY



ETHERNET




POWER LED




LCD CONNECTORS


J2 J22 FFC BOT 40/0.5 (4.3" TFT)
FFC BOT 40/0.5 COMB1

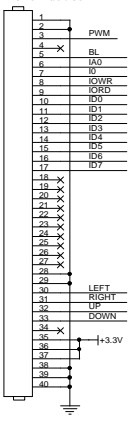


5V BACKLIGHT




OSCILLATORS



POWER SUPPLY



ETHERNET



POWER LED




Table with columns: Size, CAGE Code, DWG NO, Rev. Content includes X-GRAPH (a DELCOMp trademark), Technology 3 B-3001 Leuven, XG4100 - XG4101 - OP7400, and a date stamp: Monday, March 22, 2010.